

SILICONE RUBBER DRUM HEATERS

FEATURES



- Heating element is laminated between multiple layers of Rugged high density fiberglass reinforced silicone rubber
- Easy adjustable thermostat - displays both °F and °C
- Wide 4" wide silicone rubber
- Patented grounded heating element
- Moisture, chemical and radiation resistant

SPECIFICATIONS

- Power Density - 5.0W/in² (Metal Drums)
1.25W/in² (Plastic Drums)
- Adjustable Thermostat : up to 425°F(218°C) (Metal Drums)
up to 160°F(71°C) (Plastic Drums)
- Exposure Temperature: - 60°F to 450°F (-51°C to 232°C)
- Dielectric strength over 2000V
- Spring closure - can expand 3"
- 6ft power cord (bare wire leads)
- IP54 protection




Heavy Duty:

2 Layers Fiberglass reinforced Silicone Rubber
(Density 46oz/yard)

Extra Heavy Duty:

3 Layers Fiberglass reinforced Silicone Rubber (High Density)
(Density 75oz/yard)

DRUM HEAT-UP TIME
(55 US.GAL/ 210 L , Water, Ambient 70°F)

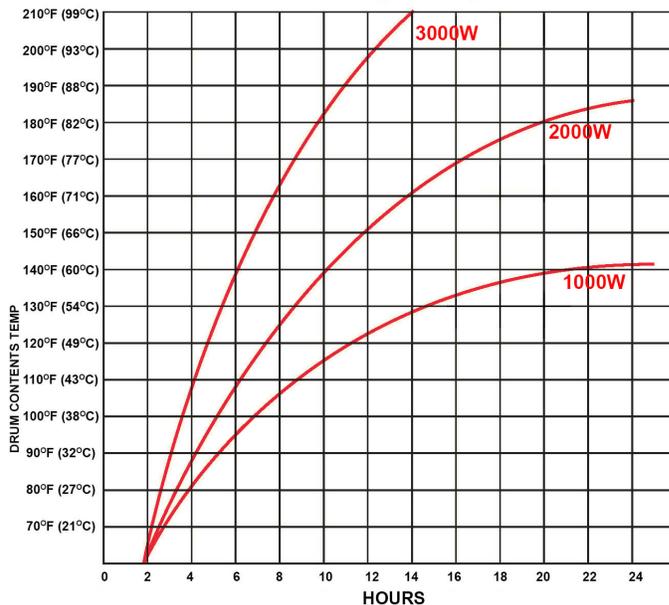

Drum Heater Sizes

Drum Size	Dia (nom)	Length	Width
5 US Gallon (19 L)	11.1" (282mm)	35.0" (889mm)	4" (102mm)
15/16 US Gallon (57/61 L)	14" (355mm)	44.0" (1118mm)	4" (102mm)
30 US Gallon (114 L)	18.6" (473mm)	58.5" (1486mm)	4" (102mm)
55 US Gallon (208 L)	22.3" (566mm)	70.0" (1778mm)	4" (102mm)

STOCK HEATERS FOR METAL DRUMS



Part No. for METAL Drums					
Drum Size	Watts	Heavy-Duty 120VAC	Heavy-Duty 240VAC	Extra Heavy-Duty 120VAC	Extra Heavy-Duty 240VAC
5 US Gal (19 L)	550W	DRUMC-05120550	DRUMC-05240550	DRUMCH-05120550	DRUMCH-05240550
15/16 US Gal (57/61 L)	700W	DRUMC-15120700	DRUMC-15240700	DRUMCH-15120700	DRUMCH-15240700
30 US Gal (114 L)	1000W	DRUMC-30120700	DRUMC-30240700	DRUMCH-30120700	DRUMCH-30240700
55 US Gal (208 L)	1200W	DRUMC-551201200	DRUMC-55241200	DRUMCH-551201200	DRUMCh-55241200

Standard : 6ft Power cord with bare wire leads
Adjustable Thermostat 50-425°F(20-215°C)



STOCK HEATERS FOR POLY DRUMS

Part No. for POLY (Non-Metal) Drums					
Drum Size	Watts	Heavy-Duty 120VAC	Heavy-Duty 240VAC	Extra Heavy-Duty 120VAC	Extra Heavy-Duty 240VAC
5 US Gal (19 L)	150W	DRUMC-05120150	DRUMC-05240150	DRUMCH-05120150	DRUMCH-05240150
15/16 US Gal (57/61 L)	200W	DRUMC-15120200	DRUMC-15240200	DRUMCH-15120200	DRUMCH-15240200
30 US Gal (114 L)	250W	DRUMC-30120200	DRUMC-30240200	DRUMCH-30120200	DRUMCH-30240200
55 US Gal (208 L)	300W	DRUMC-55120300	DRUMC-55240300	DRUMCH-55120300	DRUMCH-55240300

Standard : 6ft Power cord with bare wire leads
Adjustable Thermostat 50-160°F(20-71°C)

